

12

**EUROPEAN PATENT APPLICATION**

21 Application number: 87108335.8

51 Int. Cl.<sup>3</sup>: **C 09 D 3/58**  
**C 09 D 5/04, C 08 G 59/24**

22 Date of filing: 10.06.87

30 Priority: 10.06.86 US 872391

43 Date of publication of application:  
16.12.87 Bulletin 87/51

84 Designated Contracting States:  
AT BE CH DE ES FR GB IT LI NL SE

71 Applicant: **UNION CARBIDE CORPORATION**  
39 Old Ridgebury Road  
Danbury Connecticut 06817(US)

72 Inventor: **Kubisen, Steven J., Jr.**  
68 Riverbend Drive  
North Brunswick New Jersey 08902(US)

72 Inventor: **Eaton, Robert F.**  
Mill Pond Road  
Belle Mead New Jersey 08502(US)

74 Representative: **Wuesthoff, Franz, Dr.-Ing. et al,**  
**Patentanwälte Wuesthoff-v. Pechmann**  
**-Behrens-Goetz-v. Hellfeld Schweigerstrasse 2**  
**D-8000 München 90(DE)**

54 High solids sag resistant cycloaliphatic epoxy coatings containing low molecular weight high Tg organic polymeric sag resisting additives.

57 Sprayable, thermosetting, sag-resistant coating composition comprising at least 50 weight percent nonvolatiles comprising: (a) 100 weight parts of a crosslinkable cycloaliphatic epoxy containing at least one cycloaliphatic ring, (b) 0 to 100 weight parts of a crosslinking/chain-extending agent compatible with and capable of crosslinking and/or chain-extending said epoxy, and (c) a sag control system comprising 5 to 40 weight parts of an organic polymer having a glass transition temperature of at least 25°C and a number average molecular weight of not more than 12,000.

**EP 0 249 201 A2**

HIGH SOLIDS SAG RESISTANT CYCLOALIPHATIC EPOXY COATINGS  
CONTAINING LOW MOLECULAR WEIGHT HIGH T<sub>g</sub> ORGANIC  
POLYMERIC SAG RESISTING ADDITIVES

BACKGROUND OF THE INVENTION

5     1. Field of the Invention

The present invention relates to flow control systems for reducing sag in coating compositions comprising cycloaliphatic epoxides. More in particular, the present invention relates to flow control systems for cycloaliphatic epoxy coating compositions organic polymers having a number average molecular weight of not more than 12,000 and a glass transition temperature of at least 25°C.

10     2. Description of the Prior Art

15     The decline of the environment has spawned ever-increasing awareness concerning hazardous, toxic and polluting conditions. Statutes and regulations have been, and are now, being enacted to regulate, among other places, the industrial workplace. Emission controls apply not only to internal combustion engines and power plant exhaust stacks but to vapors being emitted by coating compositions as they are prepared, applied to substrates and subsequently cured. Emission controls have become increasingly more strict and in

20

response, significant if it has been direct & to  
creating high solids coating compositions containing  
reduced amounts of non-reactive volatile diluents and  
unpolymerized volatile monomers.

5           New problems have arisen with the new generation of  
high solids coatings. This is especially true in high  
solids coating systems having prepolymer resins or  
resins which are crosslinked during the curing phase.  
Without the ability to use uncontrolled amounts of  
10 non-reactive volatile diluents, e.g., organic solvents,  
with the systems, viscosity control has become a major  
concern. Viscosity control is important for a number of  
coating application methods including air spray, airless  
spray, electrostatic spray, roller coating, dip coating  
15 and curtain coating. The high solids coating systems  
must be useful for such methods as power (e.g. air  
atomized or airless) spray painting large vertical metal  
substrates. High solids coating compositions which are  
too viscous are not economically feasible as they cannot  
20 be readily used in power sprayers. When high solids  
coating compositions have a viscosity which is  
compatible with methods for power spraying vertical  
metal substrates, too thick a coating of low viscous  
material causes sagging. Sag resistance is a major  
25 problem with high solids coatings.

Sag is defined as the undesirable flow of the coating on vertical or near-vertical surfaces to produce films of unequal thickness. The phenomenon of sagging may be measured with each particular coating composition as sag resistance. Sag resistance is that thickness of coating upon a vertical surface which may be applied without that particular thickness sagging. Thus, a high solids coating composition must be of sufficiently low viscosity to be applied by power sprayers yet sufficiently sag-resistant to permit a reasonably thick coating upon a vertical metal substrate without sagging.

Increasingly strict emission controls have resulted in the development of high solids coatings such as those based on cycloaliphatic epoxide crosslinked or chain extended with polyols. Such epoxy compositions are highly desirable for coating substrates because extremely durable coatings are achievable. Such epoxy compositions are very compatible with power spraying techniques as they have a very low viscosity; however, they require heat to initiate crosslinking or chain extended with many available catalyst systems. Heating of the substrate and coating causes the viscosity of the coating to further decrease and the occurrence of the sag phenomenon to increase. Thus, the use of epoxy compositions as high solids coating compositions is very

challenging because the heat-curing process exacerbates the sag phenomenon.

A common method used heretofore to control sag was to blend a small amount of a higher molecular weight polymer with the low molecular weight oligomers in the coating compositions. The higher viscosity of the high molecular weight polymeric additive is often sufficient to control sag. At the same time the higher viscosity requires the addition of more solvent to thin to application viscosity which is undesirable because it promotes sag and defeats the purpose of high solids compositions which is to reduce the amount of volatiles emitted after application to the substrate. Typical high molecular weight polymers which can be used are the cellulose acetate butyrate resins, phenoxy resins and the vinyl chloride-vinyl acetate copolymer or terpolymer resins.

Other types of additives heretofore used to control sag are silicas of various types. These generally reduce gloss to an undesirable level. Many other types of sag-control additives commercially available are based on derivatives of castor oil. All of those tested reportedly were found to be incompatible with cycloaliphatic epoxides. Another type of sag-control additive is the acrylic microgel concentrate which is

described as a dispersion of hydroxyl-containing acrylic microgel in a polymer solution. When these acrylic microgel additives are used in cycloaliphatic epoxide coatings, they impart no sag resistance at all.

5 U. S. - A - 4,522,958 and 4,526,910

describe high solids epoxy coating compositions using inorganic microparticles, e.g., silica, for sag control. The silica microparticles, it is taught, avoids having to use organic microgels to prevent sagging. U. S. - A - 4,522,958 uses carbon-containing molecules, e.g., aliphatic alcohol radicals, chemically bonded to the inorganic microparticles at the surface of the microparticles. U. S. - A - 4,526,910 uses inorganic particles which are essentially free of carbon-containing molecules chemically bonded to the surface thereof.

15 U. S. - A - 4,290,932 and 4,377,661  
have identical disclosures directed to solving sag problems in polymer coating systems by the addition of acrylic microgels which are stable  
20 dispersions of microparticles in an organic solvent, usually 0.05 to 10  $\mu\text{m}$  in size and composed of a polymer crosslinked to the extent that it is insoluble in the organic solvent in which the particles are  
25 dispersed. It is taught that microgels allow for higher

solids content in acrylic polymer coating compositions without raising viscosity. Pigment orientation is improved and sag resistance is controlled, it is taught, by carefully selecting a crosslinking agent which can cause the microgels to react with the acrylic coating composition.

U. S. - A - 4,540,734 teaches controlling sag problems in polyurethane clearcoat compositions by adding a flow control system composed of urea thixotrope/acrylic microgel additives (e.g., a lightly crosslinked polymethyl methacrylate). Other microgels may be used, such as, polystyrene, polyethylene or polybutadiene microgels. This patent teaches that the microgels act as tie molecules by providing sites for attachment by secondary bonding associations of the clear coat system, wherein secondary bonding is between polyurethane resin, thixotrope and the microgel before the paint is cured. The solution to the sag problem taught by said patent is limited to polyurethane systems since the sag control system is designed to react specifically with hydroxy terminated urethane bonder resins.

U. S. - A - 4,479,990 is an improvement patent designed to improve upon the teaching of U. S. - A - 4,102,851. Here,

cycloaliphatic oxides are used to coat the inside of conduits used for channeling sulfur hexafluoride gas to open circuit breakers to diminish arcing phenomenon and sag control in the coating is critical. The

5 cycloaliphatic epoxy resin has a backbone structure which comprises two cycloaliphatic rings joined by a bridge structure that does not contain more than five atoms in the direct chain between the rings, each cycloaliphatic ring having an epoxy oxygen connected to  
10 a pair of vicinal carbon atoms. To the cycloaliphatic epoxy resin is added a flexibilizing agent of polyazelaic polyanhydride or hexahydrophthalic anhydride and a filler material such as aluminum trihydrate or magnesite. The sag-resisting material, or thixotroping  
15 agent, is finely divided aluminum oxide, i.e.,  $Al_2O_3$ .

U. S. - A - 4,539,348 and 4,546,014

teach stabilizing high solids film forming resins with water-swellaable microgel polymer particles, e.g., made from a polymerizable carboxylic acid monomer, e.g., methacrylic acid, a difunctional crosslinking  
20 monomer, e.g., ethylene glycol dimethacrylate, and one or more carboxyl-free relatively, water-insoluble polymerizable vinyl monomer, e.g., alkyl acrylates. The microgel is prepared in advance and may be added to  
25 coating compositions, e.g., epoxy resin systems of the



epihalohydrin-polyhydric phenol type, as a dry microgel powder or an aqueous suspension. Neither cycloaliphatic epoxy resins nor the sag problems associated therewith are disclosed or suggested by these patents.

5           Heretofore, a teaching was needed directed to solving sag problems with cycloaliphatic epoxy resin coating systems. Such coating systems are extremely high solids systems which are capable of forming durable coatings upon heat-curing, yet because of the low  
10           viscosity which becomes even lower during the heating step, prohibitive sagging occurs. These cycloaliphatic epoxy coating systems are difficult to use because multiple thin coats are needed in order to build up to a coating 25 to 51  $\mu\text{m}$  (1 to 2 mils) thick. What was needed was a sag  
15           control system for these cycloaliphatic epoxy resin coating systems which can maintain the coating viscosity within a range compatible with typical coating application techniques and in particular air atomized and airless spray, especially compressed air sprayers,  
20           and at the same time enable the application of a sufficiently thick coating upon a vertical substrate without sagging. Heretofore, no teaching existed in the prior art for such a sag control system.

SUMMARY OF THE INVENTION

This invention is based on the unexpected discovery that the addition of a low to moderate, but not high, molecular weight organic polymer, e.g., having a number average molecular weight of not more than 12,000, and having a glass transition temperature,  $T_g$ , of at least 25°C to a cycloaliphatic epoxy coating composition can provide an acceptable sag resistance in the absence of prohibitive increases in composition viscosity that results when high molecular weight sag modifying polymers are used at the same high solids content. The invention is based on the discovery that cycloaliphatic epoxy coating compositions containing a low to moderate molecular weight polymer, e.g., below 12,000, having a  $T_g$  of 25°C or more, are characterized by remarkably lower viscosities, and have equivalent or better sag resistances, than comparable compositions containing high molecular weight polymers heretofore used for sag control.

This invention describes a way to improve the sag resistance of cycloaliphatic epoxy resin coatings without reducing the solids content or rendering them so viscous as to be unsprayable. Heretofore, the control of sagging of these coatings before they cure was attempted by the addition of a high molecular weight

polymer such as cellulose acetate butyrate, but only at the cost of increasing viscosity and requiring the addition of more solvent. It has now been found that the low to moderate molecular weight organic polymers having as high a Tg as possible above 25°C. can improve the sag resistance of the coating without the necessity of significantly increasing viscosity, lowering solids content or causing film properties to change.

The coating compositions of this invention can be prepared a sprayable compositions at high solids, i.e., at least 50 weight % nonvolatiles and as high as 80 to 90 weight % nonvolatiles, and can be applied to vertical surfaces to provide coatings of substantial dry film thickness, e.g., 38 to 76  $\mu\text{m}$  (1.5 to 3 mils) (dry) or more, which exhibit no sagging even when elevated cure temperatures, as high as 190°C. or higher, are employed to cure the coating.

The sag-resistant coating compositions of this invention are of sufficiently low viscosities, e.g., below 300 seconds (#4 Ford cup), as to be readily sprayable with conventional power spraying equipment and, nonetheless, provide applied coatings that exhibit unexpectedly high resistance to sagging induced by gravity. It is also possible by the present invention to provide cycloaliphatic epoxy coating compositions

having extremely low viscosities, e.g., of 40 seconds or less (#4 Ford cup), thereby being useful for application by compressed air sprayers and, nonetheless providing applied coatings that are unexpectedly high in sag resistance.

#### DESCRIPTION OF THE INVENTION

According to the invention, sag or flow control for high solids coating compositions containing cycloaliphatic epoxy compounds is effected by adding a sag or flow control system. It has been found that sag resistance may be increased in high solids cycloaliphatic epoxy coating compositions by adding to the compositions an organic polymer having a number average molecular weight of not more than 12,000 and a glass transition temperature of 25°C or more. The cycloaliphatic epoxy is self-crosslinking and self-chain-extending to a certain extent and the addition of a crosslinking and/or chain-extending agent, hereinafter called the crosslinking/chain-extending agent, further facilitates the crosslinking, and/or chain-extension, of the cycloaliphatic epoxy and in addition helps to control sag and can provide flexibilization. The crosslinking/chain-extending of the cycloaliphatic epoxy coating composition can be further accelerated by the addition of a suitable

catalyst, such as, an nium salt and a suitable surfactant, .g., a silicone surfactant, may be added for ease of preparation and application and to improve appearance.


The high solids, low viscosity, sprayable, sag-resistant, thermosetting coating compositions of this invention contain, on the basis of 100 weight parts of the crosslinkable/chain-extendable cycloaliphatic epoxy, 0 to 300, preferably 25 to 100, more preferably 30 to 50, weight parts of the suitable crosslinking/chain-extending agent compatible with the cycloaliphatic epoxy and capable of crosslinking and/or chain-extending the epoxy, and a sag control system comprising 5 to 40, preferably 7 to 25, weight parts of the high Tg, low to moderate molecular weight organic polymer.

The cycloaliphatic epoxy resins useful in this invention possess at least one cycloaliphatic ring per molecule and those containing two cycloaliphatic rings to the molecule are preferred. An illustration of a preferred kind of cycloaliphatic epoxy resin suitable for use in practicing the present invention is that having the structure  $R-CO-O-CH_2-R$  wherein R is a cycloaliphatic ring, preferably but not necessarily a 6-membered aliphatic ring, having an epoxy oxygen atom connected to a pair of vicinal carbon atoms of each ring

th r of, with a visc sity at 25 C. f 200 t 450 mPa·s  
(cps) and an oxide equivalent weight of 126 to 140.


The preferred cycloaliphatic epoxy is 3,4-epoxycyclo-  
hexylmethyl-3,4-epoxycyclohexyl-carboxylate.

- 5 Another resin satisfactory for the practice of the  
invention is that having a backbone structure of



- 10 wherein R is a 6-member cycloaliphatic ring having an  
epoxy oxygen connected to a pair of vicinal carbon atoms  
thereof, i.e., a 3,4-epoxy-cyclohexyl group, with an  
epoxide equivalent weight of about 190 to 210. Such  
resin is sold by Union Carbide Corporation under the  
15 mark "ERLA 4299".

Another cycloaliphatic epoxy that can be used has  
the formula:



- 20 which may be designated 2,3-epoxy cyclopentane-4,-  
7-endo-methylene cyclohexane-6-glycidyl ether. Other  
cycloaliphatic epoxy resins useful in this invention are  
diglycidyl tetrahydrophthalate, diglycidyl hexahydro-  
phthalate, bis(2,3-epoxycyclopentyl) ether and eipchlor

hydrin-hydrogenated bisphenol A reaction products


Mixtures of 2 or more of the cycloaliphatic materials such as those described above, or mixtures of one or more of the cycloaliphatic epoxy materials and a non-cycloaliphatic epoxy material many of which are known in the art can be used.

The preferred crosslinking/chain-extending agents are polycaprolactone polyols which are described in detail in U. S. -A - 4,096,125 and polyester, polyether and polycarbonate polyols. The polycaprolactone polyols are produced by catalytic polymerization of an excess of a caprolactone and an organic polyfunctional initiator having at least two reactive hydrogen atoms. The polyols used herein can be single compounds or mixtures of compounds. The method for producing the polycaprolactone polyols is well known and the organic functional initiators may be any polyhydroxyl compound as is shown in U. S. -A - 3,169,945.

Illustrative thereof are the diols such as ethylene glycol, diethylene glycol, triethylene glycol, 1,2-propylene glycol, dipropylene glycol, 1,3-propylene glycol, polyethylene glycol, polypropylene glycol, poly(oxyethylene-oxypropylene) glycols, and similar polyalkylene glycols, either blocked, capped or heteric,

containing up to about 40 or more alkyleneoxy units in the molecule, 3-methyl-1,5-pentanediol, cyclohexanediol, 4,4'-methylene-bis-cyclohexanol, 4,4-isopropylidene-bis-cyclohexanol, xylenediol, 2-(4-hydroxymethylphenyl)-ethanol, 1,4-butanediol, ; triols such as glycerol, trimethylolpropane, 1,2,6-hexanetriol, triethanolamine, triisopropanolamine, and the like, tetrols, such as erythritol, pentaerythritol, and N,N,N',N'-tetrakis(2-hydroxyethyl)ethylene diamine.

When the polyol is reacted with the caprolactone a reaction occurs that can be presented in its simplest form by the equation:

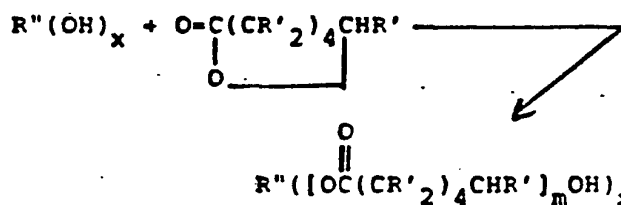

In this equation, m is a number representing the average number of repeating caprolactone derived units, x is an integer designating the number of hydroxyl groups in the polyol reactant, and R' is an alkyl, alkoxy, aryl, cycloalkyl, alkaryl or aralkyl group having up to 12 carbon atoms and at least 5 of the R' groups in the caprolactone molecule are hydrogen atoms. The polycaprolactone polyols that can be used in this



invention are shown by the formula on the right hand side of the equation; they can have an average molecular weight of from 290 to 6,000. The preferred polycaprolactone polyol compounds are those having an average molecular weight of from 290 to 3,000, more preferably from 300 to 1,000. The preferred polycaprolactone polyol-crosslinking/chain-extending agents are the polycaprolactone diol compounds having an average molecular weight of from 290 to 500 and the polycaprolactone triol compounds having an average molecular weight of from 300 to 1,000; these being preferred because of their low viscosity properties. The hydroxyl number of the polycaprolactone polyol can be from 15 to 600, preferably from 200 to 500; and the polycaprolactone polyol can have an average of from 2 to 6, preferably 2 to 4, hydroxyl groups.

Illustrative of polycaprolactone polyols that can be used as crosslinking agents in this invention there can be mentioned the reaction products of a polyhydroxyl compound having an average of from 2 to 6 hydroxyl groups and the caprolactone. In the following table there are listed illustrative polycaprolactone polyols useful as crosslinking/chain-extending agents in this invention. The first column lists the organic

functional initiator that is reacted with the caprolactone and the average molecular weight of the polycaprolactone polyol is shown in the second column.

- 5 Knowing the molecular weights of the initiator and of the polycaprolactone polyol one can readily determine the average number of molecules of caprolactone (CPL Units) that reacted to produce the compound; this figure is shown in the third column.

## POLYCAPROLACTONE POLYOLS

Initiator	Average MW of Polyol	Average No. of CPL Units in Molecules
1 Ethylene glycol	290	2
2 Ethylene glycol	803	6.5
3 Ethylene glycol	2,114	18
4 Propylene glycol	874	7
5 Octylene glycol	602	4
6 Decalence glycol	801	5.5
7 Diethylene glycol	527	3.7
8 Diethylene glycol	847	6.5
9 Diethylene glycol	1,246	10
10 Diethylene glycol	1,998	16.6
11 Diethylene glycol	3,526	30
12 Triethylene glycol	754	5.3
13 Polyethylene glycol (MW 200)*	713	4.5
14 Polyethylene glycol (MW 600)*	1,398	7
15 Polyethylene glycol (MW 1500)*	2,868	12
16 1,2-Propylene glycol	646	5
17 1,3-Propylene glycol	988	8
18 Dipropylene glycol	476	3
19 Polypropylene glycol (MW 425)*	835	3.6
20 Polypropylene glycol (ME 1000)*	1,684	6
21 Polypropylene glycol (MW 2000)*	2,456	4
22 Hexylene glycol	916	7
23 2-Ethyl-1,3-hexanediol	602	4
24 1,5-Pentanediol	446	3
25 1,4-Cyclohexanediol	629	4.5
26 1,6-Bis(hydroxyethyl)-benzene	736	5
27 Glycerol	548	4
28 1,2-6-Hexanetriol	476	3
29 Trimethylolpropane	590	4
30 Trimethylolpropane	750	5.4
31 Trimethylolpropane	1,103	8.5
32 Triethanolamine	890	6.5
33 Erythritol	920	7
34 Pentaerythritol	1,219	9.5

\* - Average molecular weight of glycol

The preferred crosslinking/chain-extending agent is a polycaprolactone triol having an average molecular weight of about 900 and an average hydroxyl number of 187.

5           The sag control system of the present invention comprises an organic polymer which may be any organic polymer (1) that is not incompatible with the cycloaliphatic epoxy, crosslinking/chain-extending agent or any other component of the coating composition, (2)  
10       that has a glass transition temperature ( $T_g$ ) of at least  $25^{\circ}\text{C}$ , e.g.,  $25^{\circ}\text{C}$  to  $250^{\circ}\text{C}$ , preferably at least  $30^{\circ}\text{C}$ , more preferably from  $30^{\circ}\text{C}$  to  $150^{\circ}\text{C}$ , and (3) that has a molecular weight of not more than 12,000, preferably not  
15       more than 8,000, but not so high a  $T_g$  or molecular weight that solutions or dispersions containing the polymer, as in the coating compositions, are too viscous for application to and flowing onto a substrate or are too viscous for spraying onto a substrate. The molecular weight of suitable organic polymers can range  
20       from 1,000 to 12,000, preferably 1,000 to 8,000, and the glass transition temperature can range from  $25^{\circ}\text{C}$  to  $250^{\circ}\text{C}$ , preferably  $30^{\circ}\text{C}$  to  $150^{\circ}\text{C}$ .

25           Suitable for use as the organic polymer constituent in the present invention are the vinyl polymers having a  $T_g$  ranging from  $25^{\circ}\text{C}$  up to the  $T_g$  at which the vinyl

0249201

polymer tends to be the coating composition, in which it is contained, too viscous for application to and flowing on a substrate or are too viscous for spraying. The number average molecular weight of suitable vinyl polymers range from 1,000 up to 12,000, preferably 8,000, or up to the maximum number average molecular weight at which, for the T<sub>g</sub> of the vinyl polymer, coating compositions containing same can be applied to and flowed on the substrate to be coated or can be applied by spraying.

Copolymers of vinyl acetate and vinyl chloride are also useful in this invention to reduce sag in cycloaliphatic epoxy coating compositions. Preferably, the vinyl copolymers can have an average molecular weight of 1,000 to no more than 12,000, preferably no more than 8,000, the vinyl chloride content of the polymers may range preferably from 67 wt. % to 90 wt. % and the vinyl acetate content preferably ranges from 4 wt. % to 14 wt. %.

Additionally, the vinyl copolymers should have a hydroxyl content of 2% to 3.5%. Technically, these polymers can be considered to be terpolymers of vinyl chloride, vinyl acetate and an epoxy-containing monomer or a hydroxy-containing monomer, e.g., vinyl alcohol or a hydroxyl alkyl acrylate with the hydroxyls being carried on the vinyl

monomer. Suitable vinyl copolymers are available commercially from Union Carbide Corporation under the designations UCAR Solution Vinyl Resins, VROH, VYES, VMCA, VYLF and VYNC. 0249201

5           One well known method for making the vinyl copolymers (although this is not the only method to produce vinyl copolymers useful in this invention) is to polymerize a heterogeneous mixture of substituted ethylenes, i.e., the vinyl monomer, such as, vinyl  
10           chloride and vinyl acetate, using an initiator such as a peroxide. The peroxide functions by breaking down to form a free radical. This free radical adds to a molecule of vinyl monomer and in doing so generates another free radical. This free radical adds to still  
15           another molecule of vinyl monomer to generate a still larger radical which, in turn, adds to another molecule of vinyl monomer and so on. Eventually the chain is terminated by steps, such as the union of two radicals, that consume but do not generate radicals. This is  
20           known as chain-reaction polymerization. It is also conceivable that chain-reaction polymerization may proceed, not by way of free radicals, but by way of organic ions, or within the coordination sphere of a transition metal complex.

0249201

Other relatively high Tg, relatively low molecular weight organic polymers useful in the present invention are the styrene-alkyl alcohol copolymers such as those marketed by Monsanto Chemical Company under the trademarks RJ100 and RJ101 which respectively have number average molecular weights of 1,600 and 1,150, Tg's of about 100°C and 101°C, 12.3 and 8.3 moles of polymerized styrene per mole of copolymer, and hydroxyl contents of 5.7 wt. % and 7.7 wt. %.

Other relatively low or low to moderate molecular weight polymers are the acrylic polymers in an appropriate solvent such as those sold by Polyvinyl Chemicals, Inc. under the designation NeoCryl DP-201. Also, the skilled polymer chemist is able to produce other acrylic polymers from monomers such as acrylic acid, methacrylic acid, methyl methacrylate, methyl acrylate, ethyl, propyl and butyl acrylates and methacrylates and further has the knowledge and means enabling him to control the Tg and number average molecular weight within the parameters described hereinabove.

Other low or low to moderate molecular weight polymers having a Tg of 25°C or greater, preferably 30°C or greater, include the polyesters made by addition polymerization of polycarboxylic acids and/or anhydrides

with polyhydric alcohols or polyols; the polyamides,  
    .g., th nylons; polyac tals; phenol-aldehyde polymers;  
urea-aldehyde polymers; polyurethanes; acrylonitrile and  
methacrylonitrile polymers and copolymers, styrene  
5 polymers and copolymers, isobutylene copolymers, and  
polymers and copolymers, and any other monomer capable  
of producing polymers or copolymers having a number  
average molecular weight of not more than 12,000 and a  
Tg of 25°C or more. The prior art contains sufficient  
10 teachings to enable the skilled polymer chemist to  
prepare suitable organic polymers having the Tg and  
molecular weight properties needed for use in this  
invention.

The cycloaliphatic epoxy coating compositions of  
15 this invention have nonvolatile contents of 50 wt. % or  
more, preferably 70 wt. % or more, and more preferably  
80 wt. % or more. The inventive coating compositions  
contain one or more liquid organic solvents which of  
course are present in amounts up to 50 wt. %,   
20 preferably up to 30 wt. %, and more preferably up to 20  
wt. %. The term "organic solvent" is employed in a  
broad sense and is intended to include true solvents as  
well as liquid diluents for the crosslinkable/  
chain-extendable cycloaliphatic epoxy resins and  
25 optional crosslinking/~~chain-extend~~ing agent which may




not be true solvents but are miscible with and provide a diluent and vehicle for the cycloaliphatic epoxy and optional crosslinking/chain-extending agent. The solvent system employed in this invention generally is organic. It may be a single compound or a mixture of compounds. When the solvent system contains more than one organic liquid solvent, such solvents can be selected from fast, medium speed and slow solvents in order to provide the desired drying properties to the novel coating composition. For example, too fast a solvent in a coating composition could result in the volatilization of the solvent too rapidly and the application of a dry, non-flowing powder to the substrate. The skilled worker is sufficiently knowledgeable to replace some of the fast solvent with a slower one. The relationship between the solvent system and the crosslinkable/chain-extendable cycloaliphatic aliphatic epoxy depends upon the absolute and relative natures of these materials and upon the relative amounts used. Such factors as solubility, miscibility, polarity, hydrophilicity, hydrophobicity, lyophilicity and lyophobicity are some of the factors which may be considered. Illustrative of suitable components of the solvent system which may be employed are alcohols such as lower alkanols containing 1 to 8 carbon atoms

including methanol, ethanol, propanol, isopropanol, 0249201  
butanol, sec-butyl alc hol, tert-butyl alc hol, amyl  
alc hol, hexyl alcohol, cyclohexanol and 2-ethylhexyl  
alcohol; ethers and ether alc hols such as diethyl  
5 ether, ethylene glycol monoethyl ether, ethylene glycol  
monobutyl ether, ethylene glycol dibutyl ether,  
propylene glycol monomethyl ether, diethylene glycol  
monobutyl ether, diethylene glycol dibutyl ether,  
dipropylene glycol monoethyl ether, and dipropylene  
10 glycol monobutyl ether; ether esters, glycol ether  
esters; ketones such as acetone, diisobutyl ketone,  
methyl ethyl ketone, methyl isobutyl ketone, methyl amyl  
ketone and methyl N-butyl ketone; esters such as butyl  
acetate, hydroxyethyl acetate, 2-ethoxyethyl acetate and  
15 2-ethylhexyl acetate, aliphatic and alicyclic  
hydrocarbons such as the various petroleum naphthas and  
cyclohexane, aromatic hydrocarbons such as toluene and  
xylene.

The amount of organic solvent present in the inventive  
20 coating dispersion can be 50 wt. % or less,  
preferably 20 wt. % or less and, most preferably less  
than 10% by weight, based on the total weight of  
the composition. As discussed above, a unique feature  
of the coating composition of this invention is the  
25 ability to formulate coating compositions containing

smaller amounts of organic solvent than conventional dispersi ns of film-forming r sins. It is most preferred therefore that the organic solvent be used in as small quantities as possible, i.e., that amount just  
 5 sufficient to dissolve the film-forming resin or provide sufficient fluidity to the composition to enable reasonably facile application, by power spraying, compressed air spraying or otherwise, of the composition to form a coating on a substrate.

10 In addition to the above-described ingredients for the cycloaliphatic epoxy coating compositions of this invention, other ingredients may be desirable such as catalysts to accelerate curing, i.e, crosslinking/  
 chain-extending, and surfactants for ease of preparation  
 15 and application of the novel coating compositions. A preferred catalyst for the inventive coating compositions is diethylammonium-triflate having the formula:

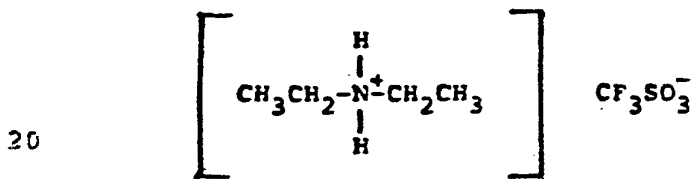

The Minnesota Mining and Manufacturing Corporation is a commercial supplier for this catalyst which is marketed under the proprietary designation FC-520. Any other suitable catalyst can be used, including other triflic

acid salts, niium salts, boron trifluoride and ther Lewis acid catalysts.

The preferred surfactant is polyalkyleneoxide-polymethylsiloxane copolymer which is a silicone  
5 surfactant. It has a boiling point of 1 bar in excess of 150°C, a freezing point of less than 0°C, a specific gravity of 1.038 at 25°C, a vapor pressure at 23°C of less than 1.33mbar (1 mm of mercury). Its vapor density is greater than 1 and its solubility in water is  
10 complete. It is a clear, amber liquid which has a mild polyether odor. This copolymer surfactant is a mixture of 80 wt. % polyalkyleneoxide-polymethylsiloxane copolymer and 20% ethylene glycol and is available from Union Carbide Corporation as Union Carbide Silicone  
15 Surfactant L-5410. Any other surfactant, of which there are many, that is not incompatible with any of the ingredients of the novel coating compositions can be used in place of Silicone Surfactant L-5410.

The coating compositions of this invention  
20 can contain other ingredients such as participating reaction accelerators, fireproofing agents, flame-retardants, coloring agents, dyes, pigments, fillers, or any other materials for providing special effects. The types and relative amounts of such

materials for providing said special effects are well known.

The coating compositions of this invention are made by simply mixing all the ingredients at room temperature, whereupon the coating composition is ready for application to a substrate. It is preferred, however, to mix the cycloaliphatic epoxy and crosslinking/chain-extending agent. A solution of the organic polymer in an organic liquid or diluent is prepared, e.g., to produce a 40 wt. % nonvolatile solution, which is then mixed with the cycloaliphatic epoxy-crosslinking/chain-extending agent mixture and agitated to produce a uniform coating composition. The catalyst, surfactant and any other additives can be introduced into the composition or its ingredients at any stage. Two package systems can also be utilized for lower temperature and ambient cure coatings.

The inventive coating compositions can be applied to the substrate in any convenient way. For example, the

coating compositions can be brushed, rolled or sprayed onto the substrate or the substrate can be dipped into the coating compositions, which are also suited for compressed air spraying or airless power spraying.

Once applied to a substrate, heat is usually used to initiate crosslinking/chain-extending of the coating compositions into hard, durable, fully cured coatings. Heating times and temperatures can be widely varied. For example, curing temperatures of 50°C. to 260°C, preferably 80°C to 150°C. Curing times can be widely varied and typically range from 10 minutes at the temperatures in the upper end of the range to 30 minutes or an hour or more at the lower temperatures in the range.

The following examples are presented. Numbered examples typify the invention while lettered examples do not and are presented for comparative purposes. In the examples, "N.V." designates "nonvolatiles", "Tg" designates glass transition temperature, "wt. %" designates percent by weight

unless otherwise designated.

In Examples A, B, C, E, G and H additional xylene solvent was added in the amounts shown in Tables I, II and III in order to reduce the nonvolatiles content to 80 percent for comparison with the other examples at about this level of nonvolatiles content.

In the examples the following designations are used to identify the materials described below:

Epoxy Resin: 3,4-epoxycyclohexylmethyl  
3,4-epoxycyclohexanecarboxylate.

5      Crosslinking Agent 0310: polycaprolactone triol  
having a number average molecular weight of 900 and an  
average hydroxyl number of 187, measured in milligrams  
of potassium hydroxide per gram functioning as a  
crosslinking and/or chain-extending agent. (Tone 0310  
sold by Union Carbide Corporation).

10      Crosslinking Agent 0200: polycaprolactone diol  
having a number average molecular weight of 530 and an  
average hydroxyl of 212 functioning as a crosslinking  
and/or chain-extending agent. (Tone 0200 sold by Union  
Carbide Corporation).

15      CAB-0.01: cellulose acetate butyrate containing 2  
wt. % acetyl groups and 53 wt. % butyryl groups (ASTM  
D817) and having a number average molecular weight of  
16,000 and a Tg of 85°C.

20      CAB-0.2: cellulose acetate butyrate containing: 2  
wt. % acetyl groups and 52 wt. % butyryl groups (ASTM  
D817) and having a number average molecular weight of  
30,000 and a glass transition temperature, Tg, of 101°C.  
(CAB-551-0.2 sold by Eastman Kodak Company).

25      RJ-100: copolymer of styrene and allyl alcohol  
having a number average molecular weight of 1,600, 5.3  
moles of hydroxyl groups per mole of copolymer and 12.3

0249201  
moles of styrene per mol of copolymer and believed to have a Tg of 100. (Sold by Monsanto Chemical Company).

5     DP-201: high solids, 64 wt. %, solution of an acrylic copolymer in a solvent comprising 20 wt. % toluene and 80 wt. % methyl n-propyl ketone. The acrylic copolymer has a glass transition temperature of about 55°C and a Brookfield viscosity at 25°C of 700 mPa.s (cps). Prior to use in this invention, the toluene:methyl n-propyl ketone solvent was exchanged with a methyl ethyl ketone as solvent to produce a 64.1 wt. % solution of the acrylic copolymer in methyl ethyl ketone.

10     VYES: terpolymer of 67 wt. % vinyl chloride, 11 wt. % vinyl acetate and hydroxyl-containing comonomer to provide 3 wt. % hydroxyl group and having a number average molecular weight of 4,000 and a Tg of 40°C. (UCAR Solution Vinyl Resin VYES).

15     VERR: terpolymer of vinyl chloride, vinyl acetate and an epoxy-containing comonomer to provide 1 wt. % epoxy groups and having a number average molecular weight of 11,000 and a Tg of 70°C. (UCAR Solution Vinyl Resin VERR).

20     VYHH: copolymer of 86 wt. % vinyl chloride and 14 wt. % vinyl acetate having a number average molecular weight of 20,000 and a Tg of 72°C. (UCAR Solution Vinyl Resin VYHH).


25



VMCH: terpolymer of 86 wt. % vinyl chlorid , 13 wt. % vinyl acetat and 1 wt. % maleic cid having a number average molecular weight of 21,000 and a Tg of 74°C. (UCAR Solution Vinyl Resin VMCH).

- 5      VAGH: terpolymer of 90 wt. % vinyl chloride, 4 wt. % vinyl acetate and hydroxyl-containing comonomer to provide 2.3 wt. % hydroxyl groups and having a number average molecular weight of 23,000 and a Tg of 79°C. (UCAR Solution Vinyl Resin VAGH).

- 10      Catalyst: diethylammonium triflate having the formula:



- 15      (FC-520 sold by 3M).

Surfactant: poly(alkyleneoxide-methylsiloxane), 80 wt. %, and ethylene glycol, 20 wt. %. (Union Carbide Silicone Surfactant L-5410).

- 20      In the examples the following measurements and tests were performed in the manner described below:

Viscosity: The viscosity measurements were performed using a No. 4 Ford cup which is a cup with a hole in the bottom. Material to be measured was added to the cup and the period of time it takes for the

material to drain through the hole was measured in seconds. The Ford cup rating in seconds is roughly comparable to centipoise by multiplying the Ford rating by 3.5. The higher drainage times indicate higher viscosities. A viscosity of 40 seconds or less is required if the material is to be applied by compressed air spraying. Materials having a viscosity up to 270 seconds or 300 seconds can be power sprayed, although with some difficulty at the higher viscosities of 270 to 300 seconds.

Sag Resistance: Sag resistance was measured with a Leneta sag bar. Leneta bars provided with gaps having increasing ratings (in  $\mu\text{m}$ ) may be used on the coated surface to determine the widest gap which does not result in sagging of the coating. Measurements were made after a specified period of heating at a specified temperature. The higher sag resistance ratings designate the better sag resistance and a sag resistance of 76 (3) is acceptable. A sag resistance of less than 76 (3) or of a borderline 76 (3) are not acceptable in providing the advantage of this invention.

MEK Rubs: MEK Rubs is a semi-quantitative test which was performed by manually rubbing a cloth soaked with methyl ethyl ketone across the surface of the cured

coated structure while applying moderate pressure. One  
MEK Rub consisted of one back-and-forth motion across  
the surface. Greater than 100 rubs without the  
appearance of the coating upon the rag is considered an  
adequate coating.

Hardness: The coating hardness test is a  
quantitative test for determining resilience and  
hardness of the coating. Essentially a rocking device  
called a Sward hardness device was set in motion upon  
the coated surface and the degree of motion-damping  
which the coated surface contributes to the rocking  
motion of the device is the measure of hardness. The  
measurements given in Table I through III are the Sward  
hardness rating, the higher the number, the harder is  
the coating.

Mandrel Bend: The mandrel bend test is a test  
designed to determine the flexibility of the coating.  
The mandrel is a rod having a diameter around which was  
bent a substrate having coated thereon the cured coating  
being tested. The rating given each coating in Tables I  
through III below is the smallest diameter in mm (inches)  
around which the coating and substrate at 0°C could be  
bent and not exhibit cracking or flaking of the coating.  
The lower numbers indicate more flexible coatings.

Examples 1-3 and A-E

In each example 50.7 wt. parts of the epoxy resin and 16.9 wt. parts of the Crosslinking Agent 0310 were mixed to provide a uniform mixture. In each example the organic polymer was dissolved in methyl ethyl ketone to produce a solution containing 40% nonvolatiles, except in Example 1 wherein 15 wt. parts of R-J100 was mixed with 25 parts of methyl ethyl ketone forming a 37.5 wt. % N.V. solution, and, in each case, 31.8 wt. parts of the resulting solution were mixed with the epoxy resin-crosslinking agent mixture, except in Example D 11.9 wt. parts of the VAGH solution was mixed and in Example E 29.8 wt. parts of the CAB-0.2 solution was mixed with the epoxy resin-crosslinking agent mixture. In Example D 19.9 wt. parts of methyl ethyl ketone were added to the mixture and in Example E 2 wt. parts of xylene were added to the mixture. In addition, 0.4 wt. parts of diethylammonium triflate catalyst and 0.2 wt. parts silicone surfactant (both identified above) were added to the mixture of each example and the resulting coating compositions were made uniform by stirring. In Examples 2, 3, A, B, C and E the nonvolatile content was 80 wt. %, and in Example D the nonvolatile content was 73 wt. %.

The viscosity and sag resistance of the coating composition of each example were measured and are respectively given in Table I along with the number average molecular weight and Tg of each organic polymer used in each example. In measuring sag resistance, each coating was applied in different thicknesses to a 510  $\mu\text{m}$  (20 mil) thick aluminum panel by drawing down with a Leneta bar. After application and drawing down, each coated panel was allowed to sit horizontally for about 10 minutes at room temperature and then placed vertically in an oven where it was maintained at 190°C for 10 minutes.

Thereafter, additional amounts of each coating composition were applied to aluminum panels which were maintained at 121°C for 30 minutes in an oven. The film properties of the cured coatings were measured, and the results are listed in Table I.

TABLE I

Ex. No.	Organic Polymer	M.W.	Tg, °C	Sag Resistance		#4 Ford Cup Visc., S.	Hard- Ness	Mandrel Bend	
				µm	(mil)			mm	(in)
5	1	RJ-100	1600	100	76 (3)	19	70	3.175	(1/8)
	2	VYES	4000	40	76 (3)	34	116	6.35	(1/4)
	3	VERR	11000	70	127 (5)	192	98	15.875	(5/8)
	A	CAB-0.1	16000	85	76 (3*)	59	98	6.35	(1/4)
	B	VYHH	20000	72	76 (3)	246	104	3.175	(1/8)
0	C	VMCH	21000	74	102 (4)	329	86	3.175	(1/8)
	D	VAGH	23000	79	127 (5)	392	90	12.7	(1/2)
	E	CAB-0.2	30000	101	76 (3)	396	128	3.175	(1/8)

\* Borderline 3

The results given in Table I demonstrate the effects of the present invention in providing low viscosity coating compositions having good to excellent sag resistance when using low to medium molecular weight, i.e., below 12,000, organic polymers having high Tg, i.e., 25°C and above, whereas the high molecular weight polymers previously thought to be essential for sag resistance all provided coating compositions which are unacceptable for compressed air spraying and are mostly unacceptable for power spraying because of high

0249201

viscosities which, xcept for Example B, wer ver 300  
seconds.

Examples 4, 5, F, G, H and K

In each example, the epoxy resin and crosslinking agent were mixed in the proportions given in Table II to provide a uniform mixture. In Examples 4, 5, F, G and H, the low molecular weight vinyl polymer, VYES was dissolved in methyl ethyl ketone to produce a solution containing 40 wt. % nonvolatiles and the resulting vinyl copolymer solution was mixed with the epoxy resin-crosslinking agent mixture in the respective proportions given in Table II. In addition, the catalyst, surfactant and, in the case of Example K, additional solvent were added to the resulting mixtures in the proportions set forth in Table II. Thereafter, the mixture was blended to provide a uniform coating composition. The nonvolatile content of each of the mixtures was 80 wt. %, except that the mixture of Example H was 90 wt. % nonvolatiles.

The viscosity and sag resistance of the coating composition of each example were measured and are respectively presented in Table II. In carrying out the sag resistance tests, the coating composition of each example was applied to an aluminum panel which was about 508  $\mu$ m (20 mils) in thickness using a Leneta bar. Each panel was coated with different thicknesses of each coating composition and was kept in a horizontal position for 10



minutes at ambient temperature and then placed in a vertical position in an oven where it was kept at 190°C for 10 minutes. Each panel was inspected for sag and the thickest sag-free coating for each composition was recorded and is presented in Table II. In addition, each coating was applied to an aluminum panel in approximately the same thicknesses in each case and was baked for 10 minutes at 190°C. Thereafter, the film properties of each cured coating were measured and the results are presented in Table II.

TABLE II

Example	F	G	4	5	H	K
Epoxy Resin: 100% N.V.	33.8	33.8	50.8	50.8	71.3	59.6
5 Crosslinking Agent 0310: 100% N.V.	33.8	-	-	16.9	-	19.8
Crosslinking Agent 0200: 100% N.V.	-	33.8	16.9	-	-	-
Vinyl Copolymers VYES: 40% N.V.	31.8	31.8	31.8	31.8	27.9	-
10 Catalyst: 100% N.V.	0.4	0.4	0.4	0.4	0.6	0.5
Surfactant: 100% N.V.	0.2	0.2	0.2	0.2	0.2	0.2
Solvent (MEK)	-	-	-	-	-	20.0
% Nonvolatiles	80	80	80	80	90	80
Viscosity in seconds	40	29	27	34	29	14
15 Sag Resistance $\mu$ m (mil)	<76 (<3)	<76 (<3)	76 (3)	76 (3)	<76 (<3)	<76 (<3)
<u>Film Properties</u>						
MEK Rub	>100	>100	>100	>100	>100	>100
Hardness	36	16	114	116	72	86
Mandrel Bend mm (in)	3.175 (1/8)	3.175 (1/8)	6.35 (1/4)	6.35 (1/4)	25.4 (>1)	3.175 (1/8)

20 The results given in Table II (Examples 4 and 5) demonstrate the effectiveness of the low molecular weight vinyl copolymer, VYES, having moderately high  $T_g$  in providing sag resistant coating compositions that are sprayable with compressed air equipment. The

compositions of Examples F, G and H can be modified by the addition of more vinyl copolymer, VYES, to improve sag resistance to the 3 level or above and still be usable in power spraying equipment.

Example 6

In this xample 49.3 wt. parts of the epoxy resin and 16.4 wt. parts of Crosslinking Agent 0310 were mixed to provide a uniform mixture. The acrylic copolymer solution DP-201 (64.1 wt. % solids in MEK) was prepared and mixed, in the amount of 18.1 wt. parts, with the epoxy resin-crosslinking agent mixture. In addition, 12.8 wt. parts of methyl ethyl ketone, 3.1 wt. parts of the diethylammonium triflate catalyst and 0.2 wt. parts silicone surfactant (both identified above) were added to the mixture and the resulting coating composition was made uniform by stirring and had 80.6 wt. % nonvolatiles.

The viscosity and sag resistance of the coating composition were measured and found to be 76 (3) for sag resistance and 27 seconds for viscosity. In measuring the sag resistance, the coating composition was applied in different thicknesses to a 508  $\mu\text{m}$  (20 mil) thick aluminum panel by drawing down with a Leneta bar. After application and drawing down, each coated panel was allowed to sit horizontally for about 10 minutes at room temperature and then placed vertically in an oven where it was maintained at 190°C for 10 minutes.

Thereafter, additional amounts of the coating composition were applied to aluminum panels which were

maintained at 121°C for 30 minutes in an oven. The film  
properties of the cured coating were measured and the  
results are listed in Table III below.

TABLE IIIFilm Properties

MEK Rubs	>100
Hardness	42
Mandrel Bend	12.7 mm (1/2 in)

## WHAT IS CLAIMED IS:

1. A thermosetting, sag-resistant coating composition comprising at least 50 wt. % nonvolatiles comprising:

- (a) a crosslinkable cycloaliphatic epoxy containing at least one cycloaliphatic ring,
- (b) a crosslinking/chain-extending agent compatible with and capable of crosslinking and/or chain-extending said epoxy,
- (c) a sag control system comprising an organic polymer having a glass transition temperature of at least 25°C and a number average molecular weight of not more than 12,000, and
- (d) a catalyst.

2. The composition of claim 1 comprising:

- (a) 100 weight parts of the crosslinkable cycloaliphatic epoxy containing at least one cycloaliphatic ring,
- (b) 0 to 300 weight parts of the crosslinking chain-extending agent compatible with and capable of crosslinking and/or chain-extending said epoxy, and
- (c) the sag control system comprising 5 to 40

weight parts of an organic polymer having a glass transition temperature of at least 25°C and a number average molecular weight of not more than 12,000, and

(d) the catalyst.

3. Composition as claimed in claim 1 or 2 wherein said organic polymer has a number average molecular weight of 1,000 to 12,000 or of 1,000 to 8,000 and a glass transition temperature of 25°C to 250°C or of 30°C to 150°C.

4. Composition as claimed in claims 1 to 3 wherein the epoxy is 3,4-epoxycyclohexylmethyl-3,4-epoxycyclohexyl-carboxylate.

5. Composition as claimed in claims 1 to 3 wherein the crosslinking agent is a polyol.

6. Composition as claimed in claim 5 wherein the crosslinking agent is also a flexibilizing agent.

7. Composition as claimed in claim 5 or 6 wherein the polyol is a polycaprolactone polyol having an average molecular weight of from 290 to 6,000 and an average hydroxyl number of 15 to 600.

8. Composition as claimed in claim 7 wherein the

polycaprolactone has an average molecular weight of about 900 and an average hydroxyl number of about 187.

9. Composition as claimed in claims 1 to 8 wherein the organic polymer is a vinyl polymer, preferably a terpolymer of vinyl chloride, vinyl acetate, and a hydroxy-containing monomer or a copolymer of vinyl chloride and vinyl acetate.

10. Composition as claimed in claims 1 to 8 wherein the organic polymer is a copolymer of styrene and allyl alcohol.

11. Composition as claimed in claims 1 to 10 further comprising a Lewis acid catalyst.

12. Composition as claimed in claims 1 to 10 wherein the catalyst is an onium salt catalyst, preferably diethylammoniumtriflate.

13. Composition as claimed in claims 1 to 12 further comprising a silicone surfactant.

14. Composition as claimed in claim 2 comprising at least 50 weight percent nonvolatiles comprising:

(a) 100 weight parts of the crosslinkable cycloaliphatic epoxy,



(b) 25 to 100 weight parts of the  
crosslinking agent, and

(c) 5 to 40 weight parts of the organic  
polymer.

(12)

**EUROPEAN PATENT APPLICATION**

(21) Application number: **87108335.8**

(51) Int. Cl.<sup>4</sup>: **C 09 D 3/58, C 09 D 5/04,**  
**C 08 G 59/24**

(22) Date of filing: **10.06.87**

(30) Priority: **10.06.86 US 872391**

(71) Applicant: **UNION CARBIDE CORPORATION, 39 Old Ridgebury Road, Danbury Connecticut 06817 (US)**

(43) Date of publication of application: **16.12.87**  
**Bulletin 87/51**

(72) Inventor: **Kubisen, Steven J., Jr., 68 Riverbend Drive, North Brunswick New Jersey 08902 (US)**  
Inventor: **Eaton, Robert F., Mill Pond Road, Belle Mead New Jersey 08502 (US)**

(84) Designated Contracting States: **AT BE CH DE ES FR GB IT LI NL SE**

(74) Representative: **Wuesthoff, Franz, Dr.-Ing. et al, Patentanwälte Wuesthoff-v. Pechmann -Behrens-Goetz-v. Hellfeld Schweigerstrasse 2, D-8000 München 90 (DE)**

(88) Date of deferred publication of search report: **19.07.89 Bulletin 89/29**

(54) **High solids sag resistant cycloaliphatic epoxy coatings containing low molecular weight high Tg organic polymeric sag resisting additives.**

(57) Sprayable, thermosetting, sag-resistant coating composition comprising at least 50 weight percent nonvolatiles comprising: (a) 100 weight parts of a crosslinkable cycloaliphatic epoxy containing at least one cycloaliphatic ring, (b) 0 to 100 weight parts of a crosslinking/chain-extending agent compatible with and capable of crosslinking and/or chain-extending said epoxy, and (c) a sag control system comprising 5 to 40 weight parts of an organic polymer having a glass transition temperature of at least 25 °C and a number average molecular weight of not more than 12,000.

**EP 0 249 201 A3**



European Patent  
Office

# EUROPEAN SEARCH REPORT

0249201

Application Number

EP 87 10 8335

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.4)
A	EP-A-0 105 488 (UNION CARBIDE CORP.) ---	1	C 09 D 3/58
A	US-A-3 718 614 (N.M. SMYTH) * Column 1, lines 14-15, 40-55 *	1	C 09 D 5/04 C 08 G 59/24
A	DE-A-2 017 169 (KOMBINAT VEB ELEKTRONISCHE BAUELEMENTE C.V. OSSJETZKY) ---	1	
D,A	US-A-4 479 990 (G.D. DIXON et al.) -----	1	
			TECHNICAL FIELDS SEARCHED (Int. Cl.4)
			C 09 D C 08 G
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 10-04-1989	Examiner VON KUZENKO M.T.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document	